
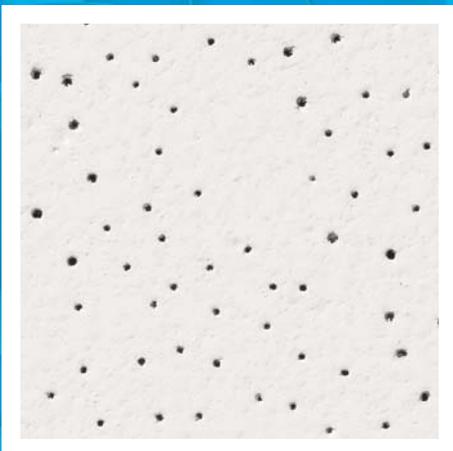




AMF THERMATEX® STAR

- THERMATEX® Star feature fine non-directional perforations on a smooth textured surface to provides a cost-effective balanced acoustic solution
- Good sound absorption (NRC 0.60) and high sound attenuations (34 dB)
- Good light reflectance (85%)
- Ideal for retail, offices and meeting rooms, installations rooms or production areas



AMF THERMATEX® STAR

Panel Options	Board	Tegular 24	Tegular 15
 Edge details	 24mm Tee Grid	 24mm Tee Grid	 15mm Tee Grid
 Thickness (mm)	15mm	15mm	15mm
 Dimensions (mm)			
	6330M	6332M	6334M
	6331M	6333M	6335M
 System	24mm exposed grid systems fully demountable	24mm exposed grid systems fully demountable	15mm exposed grid systems fully demountable
 Weight	3.6 - 3.8 kg/m ²		
 Colour	Global White		
 Sound absorption	NRC 0.60		
 Sound attenuation	34 dB		
 Fire reaction	CLASS 0/1 based on BS 476 Part 6 & 7		
 Light reflectance	≤ 88%		
 Thermal conductivity	$\lambda = 0.060 \text{ W/mk}$		
 Humidity resistance	RH95		
Cleanability			
 Sustainability	 EN ISO 14021 ≤ 48%	Knauf Armstrong provides the widest range of products that have been third party tested and certified by industry leading Eco-classification	

Contact

For further details, please contact your local representative or email asia.support@knaufarmstrong.com