



ID 311 SOFT OAK - WHITE



ID 316 ASPEN OAK - NATURAL



ID 315 SOFT OAK - LIGHT BEIGE



ID 202 COUNTRY OAK - NATURAL



ID 204 WASHED PINE - WHITE



ID 313 ASPEN OAK - GREY



for illustration purpose only



ID 208 WASHED PINE - BLUE



ID 319 PRIMARY PINE - DARK GREY



ID 312 SOFT OAK - LIGHT BROWN




ID 200 COUNTRY OAK - BROWN



ID 207 WASHED PINE - SNOW



ID 306 SOFT OAK - BLACK

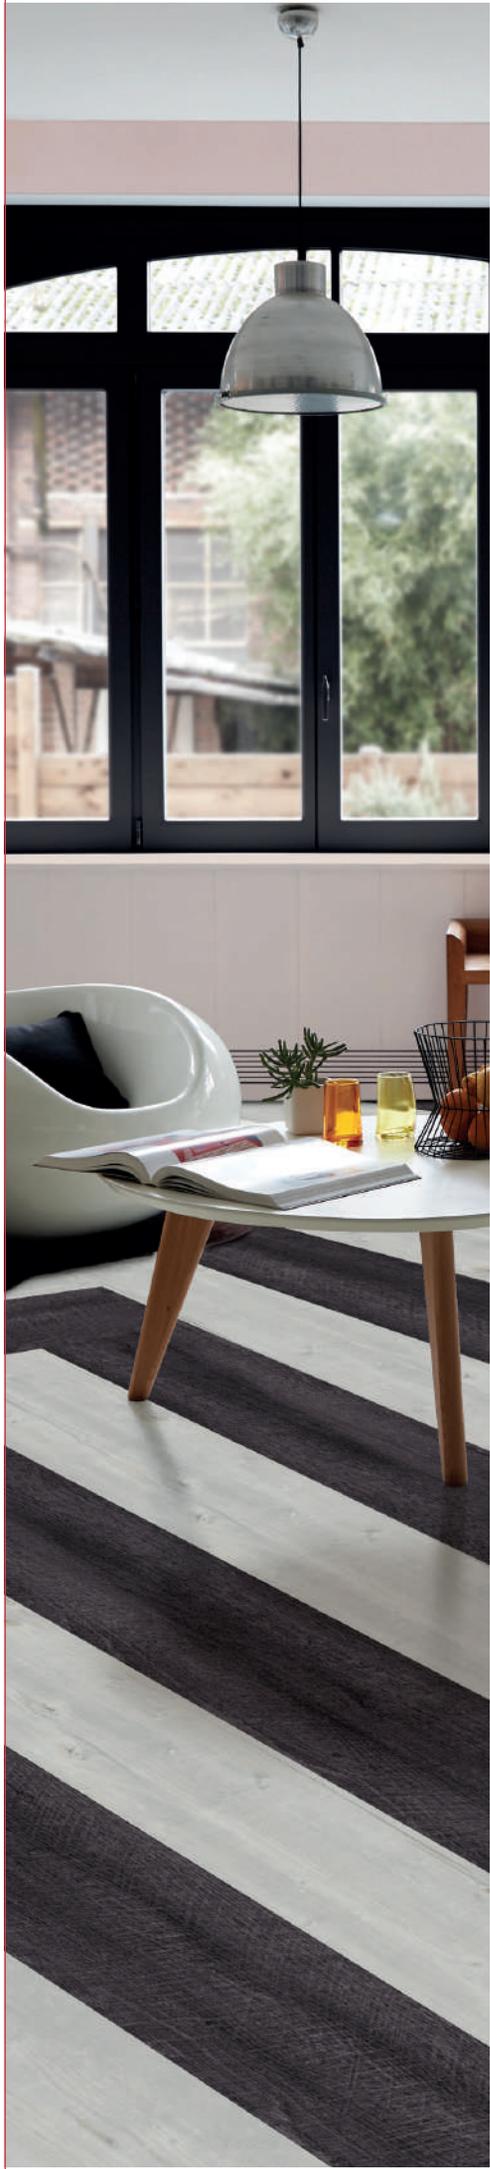

LUXURY VINYL TILES

iD
Essential 30

Specification

Luxury vinyl floorcovering in tiles and planks for domestic and light commercial use. TopClean™ polyurethane reinforcement. Product standard: ISO 10582.

CERTIFICATION & CLASSIFICATION	STANDARDS	iD Essential 30
Type of floor covering	ISO 10582	Compact Resilient Floorcovering
Compact Resilient Floorcovering	EN 14041	Yes
Classification	EN ISO 10874 (EN 685)	Domestic: 23 Commercial: 31
TECHNICAL CHARACTERISTICS	STANDARDS	iD Essential 30
Total thickness	EN ISO 24346 (EN 428)	2.0 mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.30 mm
Surface treatment (PUR)		TopClean™
Total weight	EN ISO 23997 (EN 430)	3.400 g/m ²
Wear layer binder content	ISO 10582	Type I
Form of delivery	EN ISO 24342 (EN 427) Planks Box	22.9 x 121.9 cmart. no. 3977 / 24707 _ _ _ 3 digit colour number
TECHNICAL PERFORMANCES	STANDARDS	iD Essential 30
Dimensional stability	EN ISO 23999 (EN 434)	≤ 0.25 %
Reaction to fire	EN 13501-1	B _{f1} -s1 glued over A2fl or A1fl substrate (concrete)
Residual indentation	EN ISO 24343-1 (EN 433)	Required value: ≤ 0.10 mm Average measured value: 0.03 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 (EN 425)	No damage
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2 mm
Thermal resistance Underfloor heating	EN ISO 10456	0.07 m ² K/W Suitable - max. 27°C
Impact sound reduction	EN ISO 140-8 EN ISO 717/2	ΔL _w = 4 dB
Light fastness	EN ISO 105-B02	≥ 6
Resistance to chemicals	EN ISO 26987 (EN 423)	Good resistance
Slip resistance	DIN 51130 EN 13893	R9
Electrical properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ¹⁰ Ω
Colours		Wood: 36 - Ceramic: 7

Technical data in force upon the date of publication (11/15). The values correspond to laboratory tests (no in situ test) and are subject to modification. Tarkett's instructions regarding installation, cleaning and maintenance shall be observed. Please contact your local sales rep. for these instructions. Our Sustainability tag explains the content of our products and how they contribute to our sustainability strategy and human well-being.



Customs Tariff : 4825000000F

Specification

Luxury vinyl floorcovering in planks for domestic and commercial use. TopClean™ polyurethane reinforcement. Product standard: ISO 10582

iD ESSENTIAL 30



- 1 Surface embossing: textures close to real materials
- 2 TopClean™ PUR reinforcement: extreme resistance and easy low cost maintenance
- 3 36 design options
- 4 0.30mm pure PVC transparent wear layer: exceptionally hardwearing and indentation resistant
- 5 Calandered PVC backing



THE ULTIMATE FLOORING EXPERIENCE